




**iFIT Transition module PB**  
**With INSTAFLEX spigot**

Socket fusion transition to iFIT  
 Thread in DZR brass, UBA (Umwelt Bundesamt, Germany) conform  
 EPDM sealing hot and cold water approved

d	d1	Code	SP	weight	L	z	k max.
(mm)	(mm)			(kg)	(mm)	(mm)	(mm)
16	16 - 20	<b>762 101 253</b>	1	0.075	93	73	22
20	16 - 20	<b>762 101 254</b>	1	0.088	96	76	23
25	16 - 20	<b>762 101 255</b>	1	0.110	103	83	23
25	25 - 32	<b>762 101 256</b>	1	0.164	108	83	23
32	25 - 32	<b>762 101 257</b>	1	0.213	144	86	21

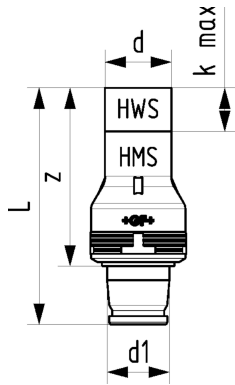

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:  
 info.ps@georgfischer.com Internet: <http://www.gfps.com>