


Adapter - female thread

Socket fusion transition to female thread
Thread in DZR brass, UBA (Umwelt Bundesamt, Germany) conform
EPDM sealing hot and cold water approved

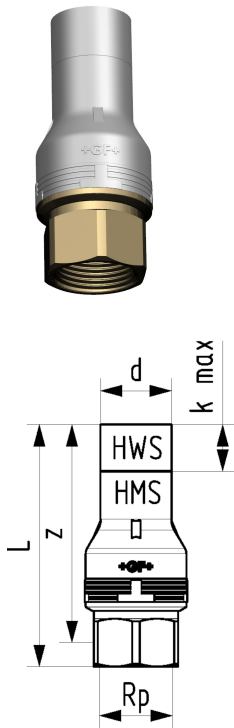

d (mm)	Rp (inch)	Part No.	SP	weight (kg)	L (mm)	z (mm)	k max. (mm)
16	½	761 069 675	1	0.091	97	84	22
20	½	761 069 676	1	0.104	100	87	23
20	¾	761 069 677	1	0.132	100	85	23
25	¾	761 069 678	1	0.151	104	89	23
25	1	761 069 679	1	0.189	108	91	23
32	1	761 069 680	1	0.184	109	92	21
40	1 ¼	761 069 681	1	0.408	130	111	24
50	1 ½	761 069 682	1	0.564	135	116	22
63	2	761 069 683	1	0.789	148	124	21

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>